


1/6


/ Figure 1

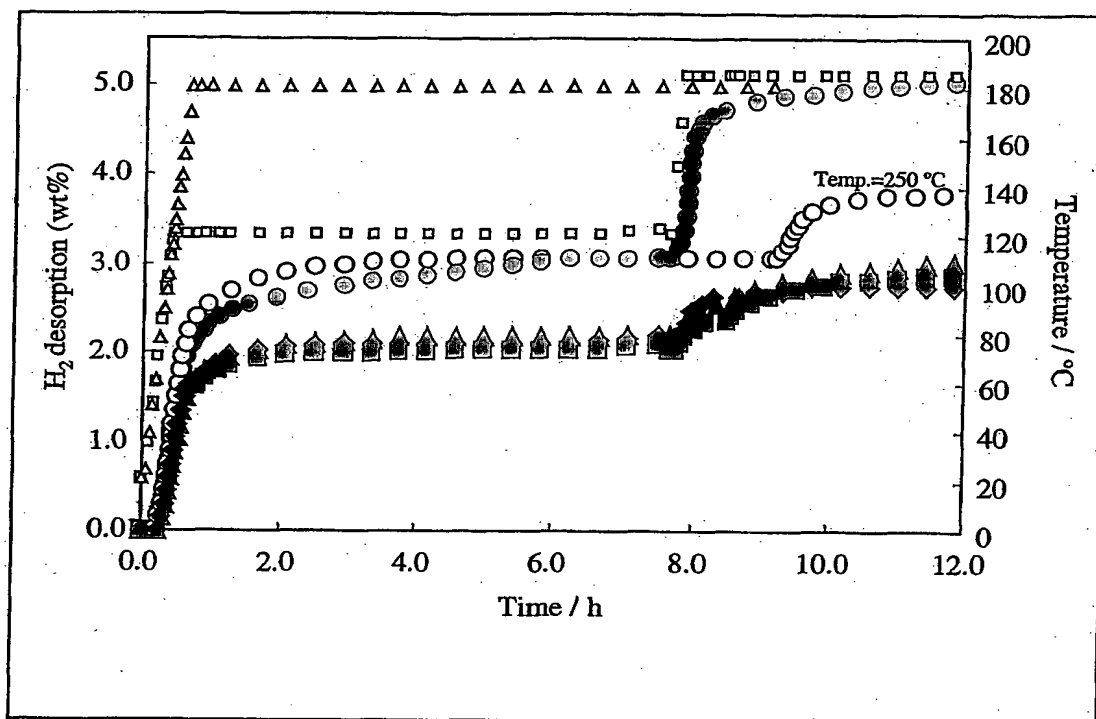

Encapsulated Ti doped NaAlH_4 (example 1); (\circ) cycle 1, (Δ) cycle 2, (\square) cycle 3, (\diamond) cycle 4, (∇) cycle 5; (\square) temperature in cycles 1 to 3 and 5; temperature in cycle 4.

2/6


Figure 2

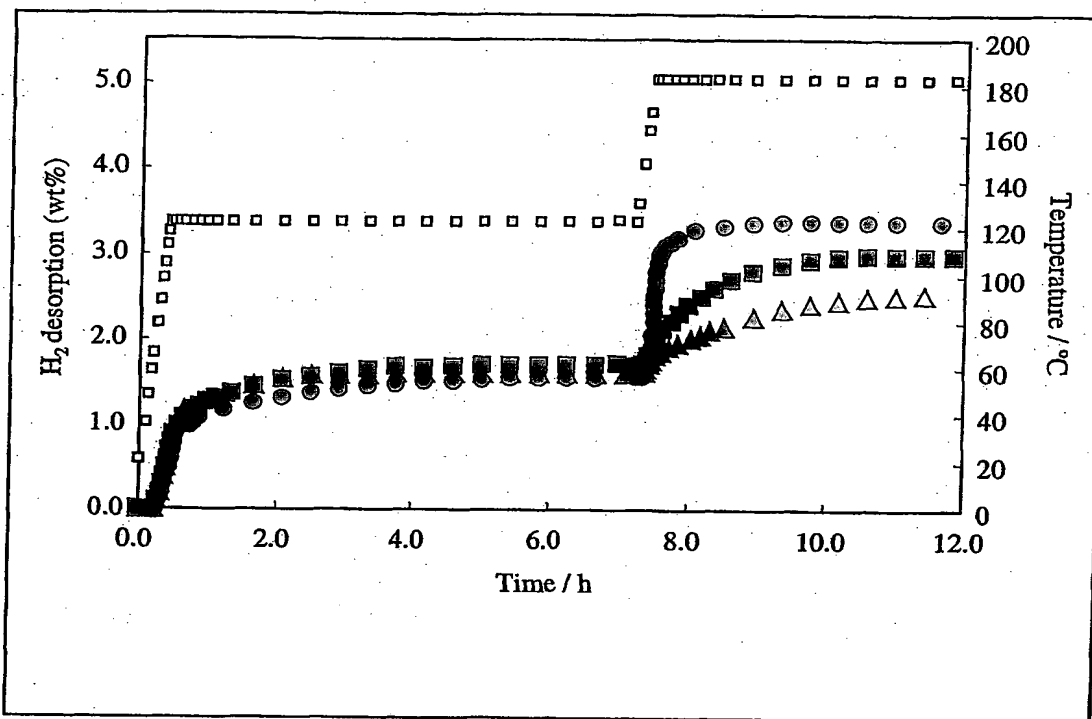

Encapsulated Ti doped NaAlH₄ (example 3); (○) cycle 1, (△) cycle 2, (◻) cycle 3, (◻) temperature in cycles 1 to 3

3/6


Figure 3

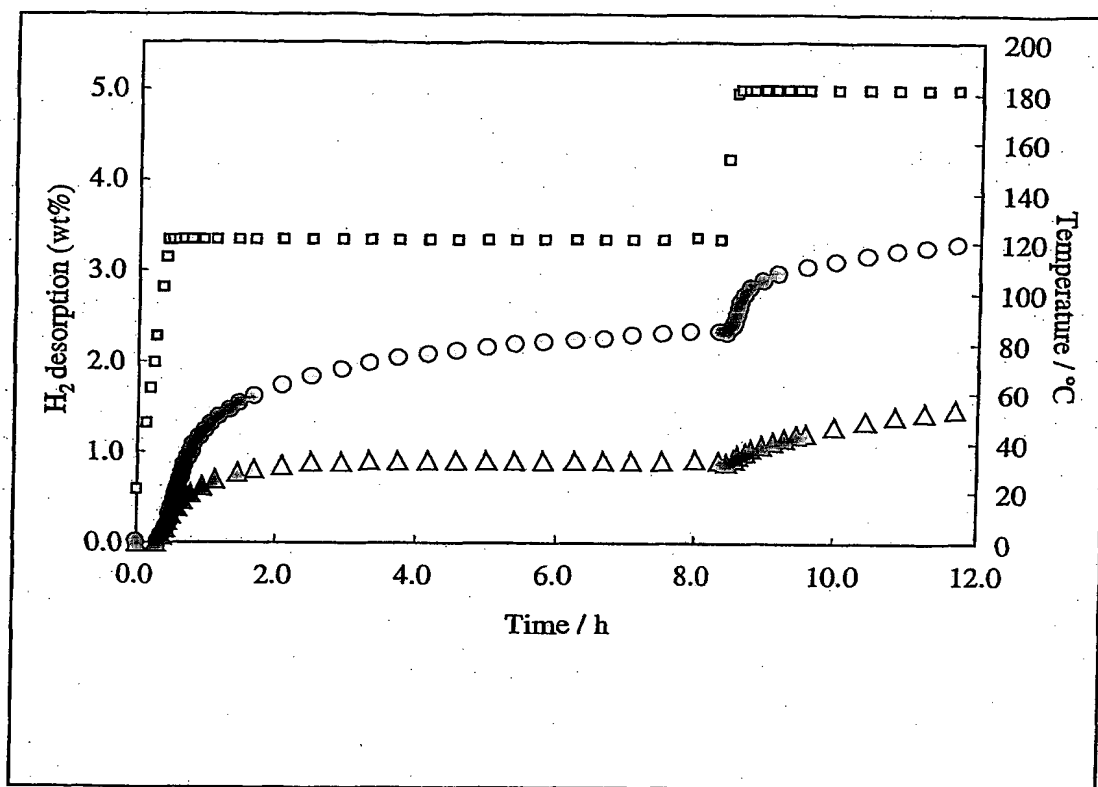

Non-encapsulated Ti doped NaAlH₄; (○) cycle 1, (△) cycle 2, (□) temperature in cycles 1 and 2

4/6

Figure 4

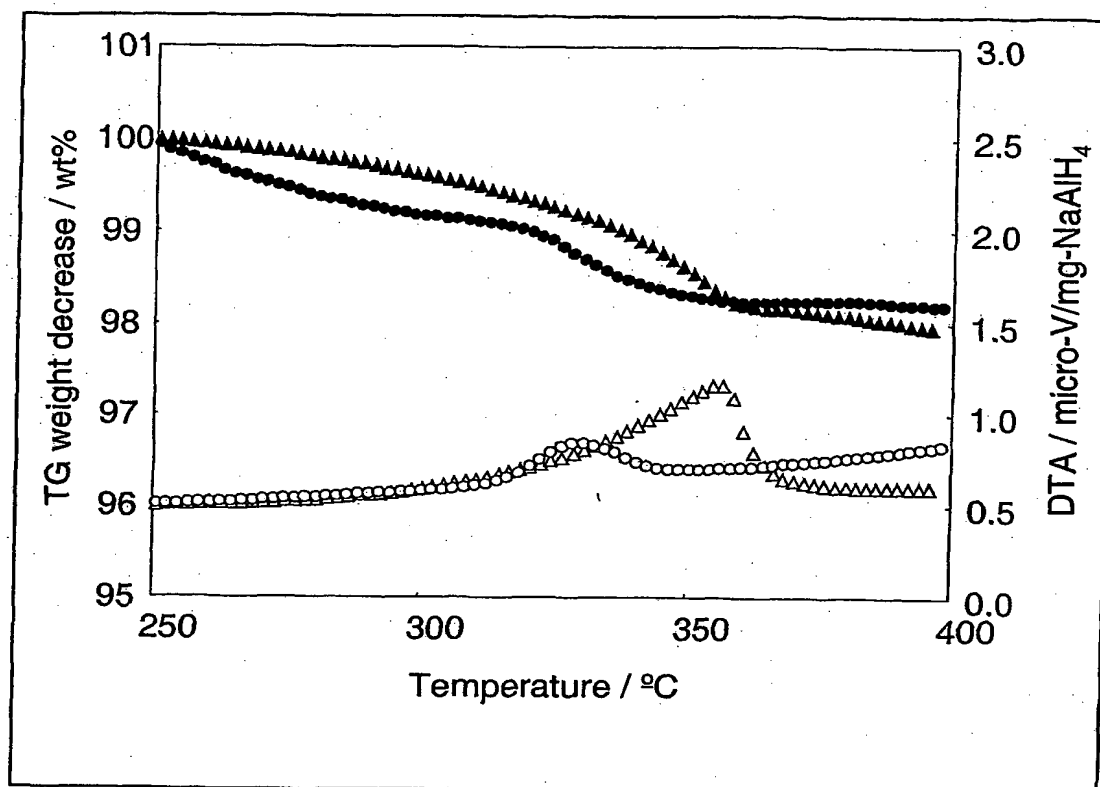


TG-DTA of encapsulated and non-encapsulated Ti doped NaAlH₄; (●) TG of encapsulated Ti doped NaAlH₄ (example 3), (▲) TG of non-encapsulated Ti doped NaAlH₄, (○) DTA of Ti doped NaAlH₄ (example 2), (△) DTA of non encapsulated Ti doped NaAlH₄.

Docket No. : 100716-62 KGB
Applicant : Ferdi SCHÜTH et al
Title : MATERIALS ENCAPSULATED IN POROUS MATRICES FOR
THE REVERSIBLE STORAGE OF HYDROGEN

5/6

Figure 5

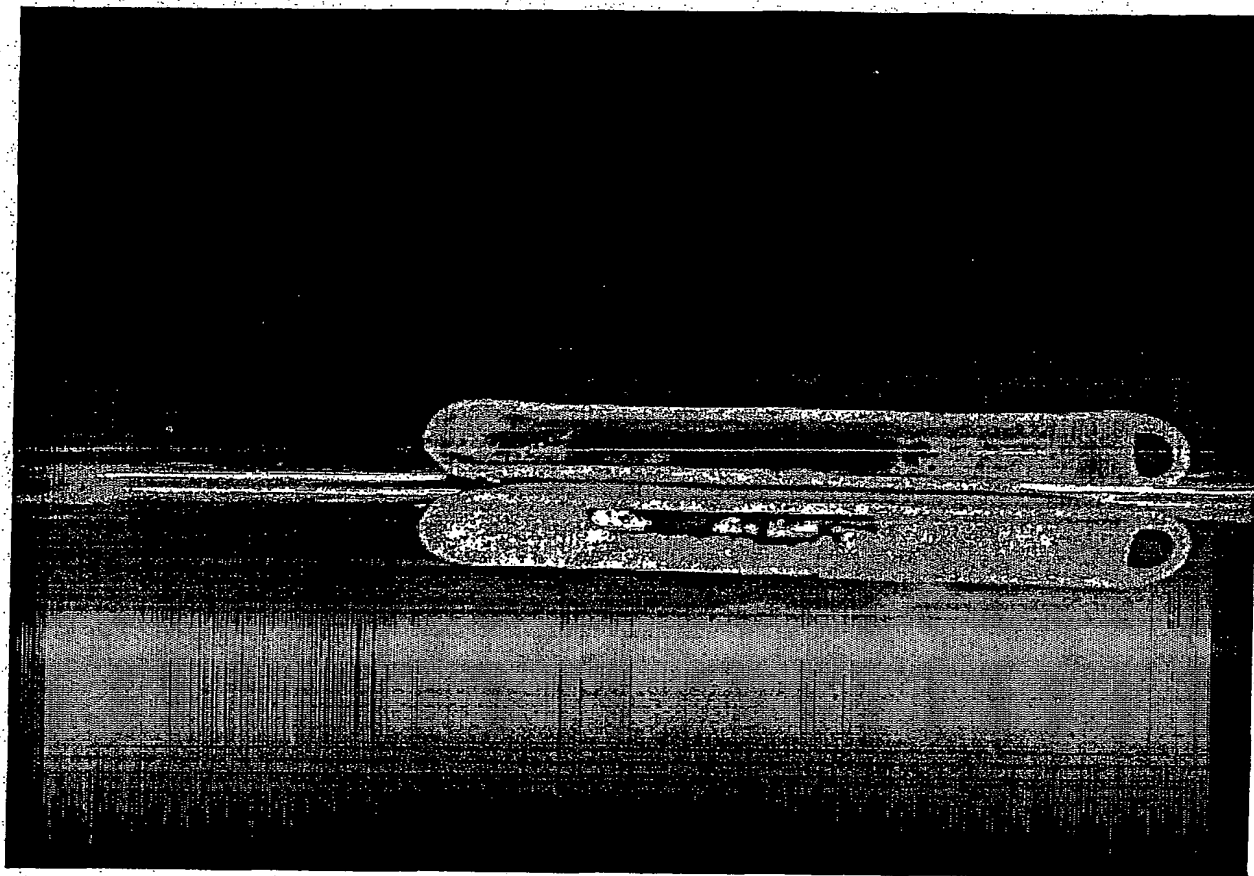

NaAlH₄ doped with Ti after contact with air:
Upper probe is encapsulated, lower is non-encapsulated (example 1).

BEST AVAILABLE COPY

6/6

Figure 6

